




The Power of Creativity™

MEIA™ -1625 INTERFACE

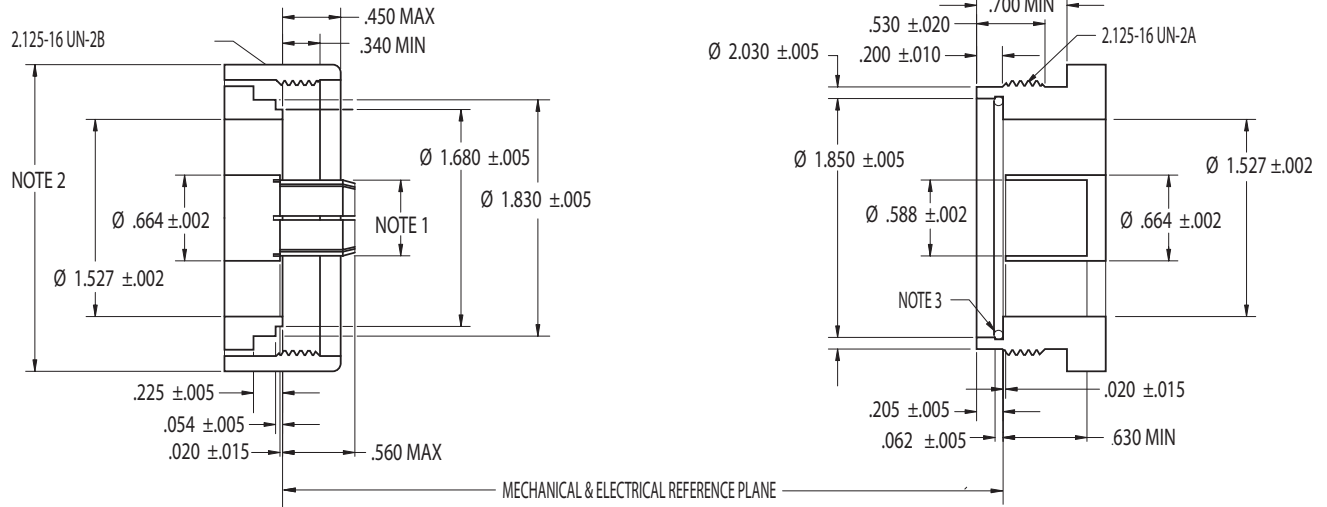

Notes: 1. Flared to mate with .588 ±.002 dia. 2. Size and shape of coupling nut are optional. 3. O-ring/gasket mating seal optional.

ELECTRICAL

Nominal Impedance	50 ohms
Frequency Range	DC to 3 GHz
Voltage Rating	5,100 volts rms
Dielectric Withstanding Voltage	10,400 volts rms

MECHANICAL

Mating Characteristics	per TRU Standards
Connector Durability	500 cycles min.
Recommended Torque	165 in-lbs nominal

MATERIALS / FINISHES

Body	Brass, Silver or Nickel Plated. Stainless Steel, Passivate
Contacts (Inner)	Female: Beryllium Copper, Silver or Gold Plated. Male: Brass, Silver or Gold Plated
Contacts (Outer)	Brass, Silver or Nickel Plated
Contacts (Slotted)	Beryllium Copper, Silver or Nickel Plated
Insulators	Teflon
Gaskets & Seals	Silicone Rubber

ENVIRONMENTAL

Temperature Range	-85°F to +329°F (-65°C to +165°C)
Vibration	MIL-STD-202 Method 204
Shock	MIL-STD-202 Method 213
Moisture Resistance	MIL-STD-202 Method 106
Corrosion (salt spray)	MIL-STD-202 Method 101

TRU Corporation

245 Lynnfield Street, Peabody, MA 01960 1-800-COAX-TRU (1-800-262-9878) www.trucorporation.com