




The Power of Creativity™

N INTERFACE

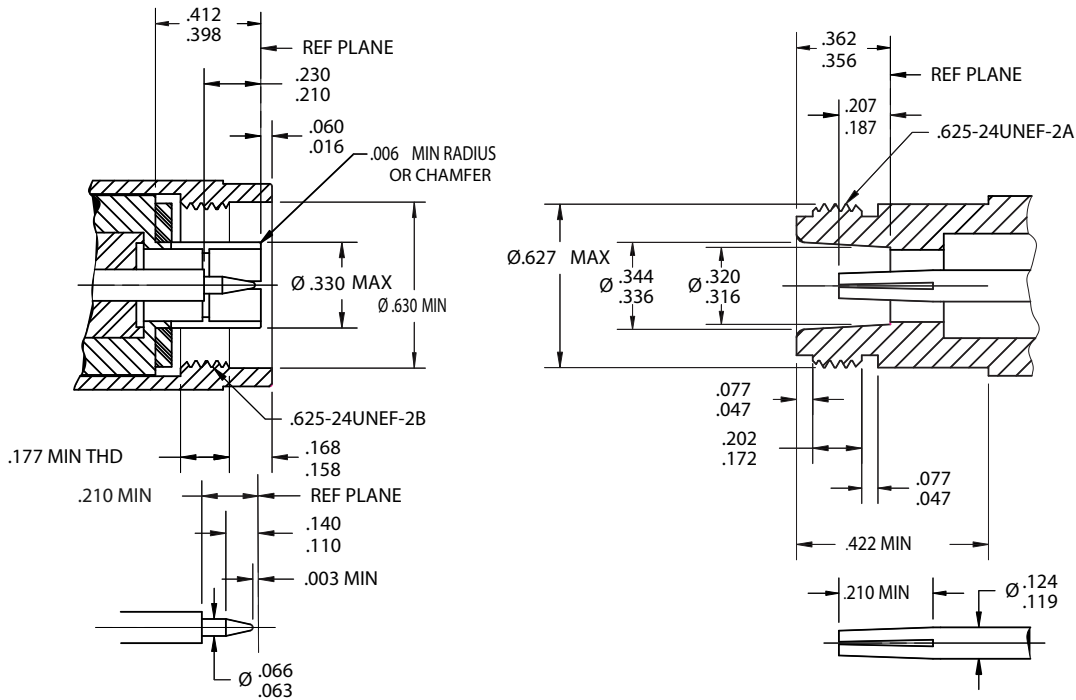

ELECTRICAL

Nominal Impedance	50 ohms
Frequency Range	DC to 18 GHz
Voltage Rating	1,000 volts rms
Dielectric Withstanding Voltage	2,500 volts rms
Intermodulation	-155 dBc

ENVIRONMENTAL

Temperature Range	-85°F to +329°F (-65°C to +165°C)
Vibration	MIL-STD-202 Method 204
Shock	MIL-STD-202 Method 213
Moisture Resistance	MIL-STD-202 Method 106
Corrosion (salt spray)	MIL-STD-202 Method 101

MECHANICAL

Mating Characteristics	per MIL-STD-348
Connector Durability	500 cycles min.
Recommended Torque	23 in-lbs nominal

MATERIALS / FINISHES

Body	Brass, Silver or Nickel Plated. Stainless Steel, Passivate
Contacts (Inner)	Female: Beryllium Copper, Silver or Gold Plated. Male: Brass, Silver or Gold Plated
Contacts (Outer)	Brass, Silver or Nickel Plated
Contacts (Slotted)	Beryllium Copper, Silver or Nickel Plated
Insulators	Teflon
Gaskets & Seals	Silicone Rubber

TRU Corporation